

RF Filter cf1090 / 30W



This is a cavity filter for 1090 MHz Mode-S / ADS-B.


You can use it to attenuate any out-of-band interference while receiving ADS-B / Mode-S. It will attenuate any transmissions from the nearby 900 MHz GSM band by 80 dB.

All connectors are SMA (female).

It can support up to 30W of RF power.

It is not suitable for outdoor environments.

Attenuation Diagram

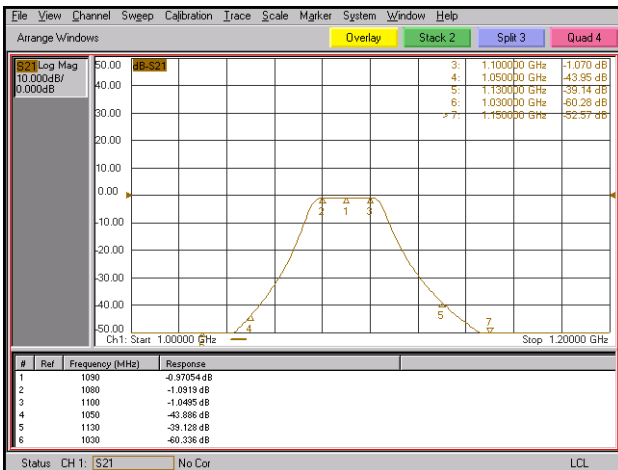

Beyond this product

sysmocom not only offers this product, but a variety of other products and services, such as

- **sysmoNITB 2G starterkit** complete ready to run 2G solution for lab testing and training
- **sysmoNITB 3.5G starterkit LE** sysmocom's first ready to run 3.5G solution
- **sysmoBSC** Base Station Controller, supporting Abis/IP as well as legacy E1 interfaces
- **sysmoNITB** autonomous self-contained GSM network
- **sysmoSIM** SIM cards, pre-programmed and with custom printing
- **sysmoBTS** range from 1TRX 0.2W to 2TRX 2x10W
- extensive portfolio of **support contracts** for all sysmocom Products
- **training services** for installation, network deployment, operation
- **vendor-agnostic integration** and inter-operation with other vendor RAN and Core Network products
- variety of sectorized and omni-directional **antennas** as well as **RF cabling** and **accessories**

Custom-tailored GSM solutions

sysmocom is not just another RAN vendor with a fixed product portfolio. All our products are based on Open Source software components, permitting customization both by sysmocom as well as the customer.

Access to the source code is key in enabling our customers to create products and services outside the constraints of existing, standardized GSM protocols, interfaces or procedures. Any aspect of our products can be modified according to customer needs.

Contact Information


We appreciate inquiries from end-users, operators as well as retailers.

sysmocom – systems for mobile communications GmbH
Alt-Moabit 93
10559 Berlin
GERMANY

Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de
web: <http://sysmocom.de/>

RF Filter cf1090 / 30W

Dimensions

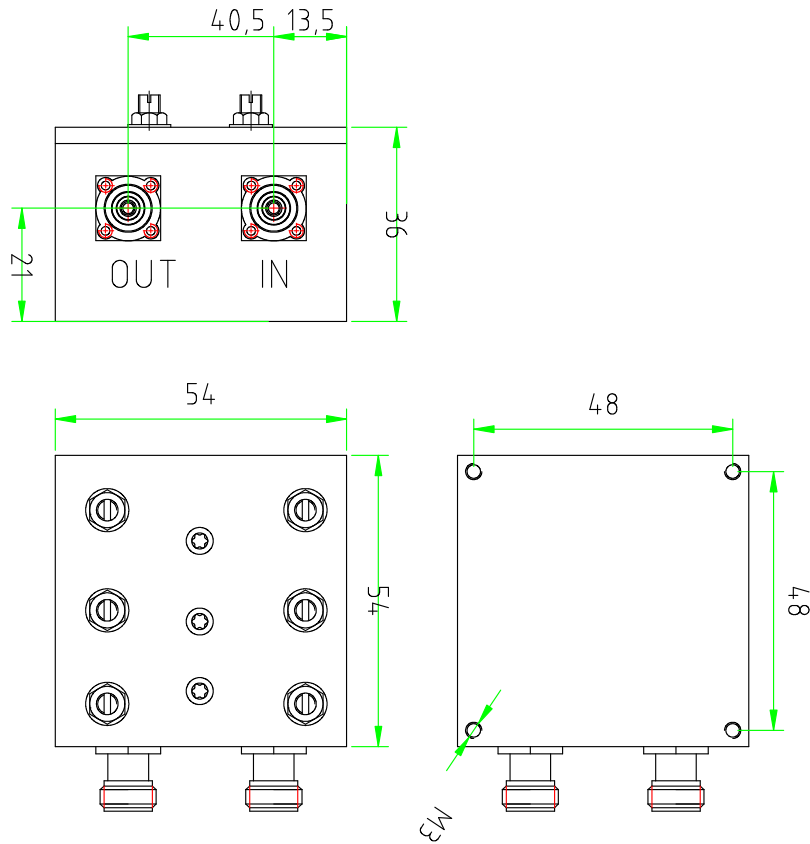

Specifications

Pass Band	1086 - 1094 MHz
Insertion Loss	1.0 dB
Passband Ripple	0.2 dB
Rejection	80 dB @ 921-960 MHz (GSM900)
VSWR	<=1.20
Impedance	50 Ohms
Power	30 W average RF power
Temperature	-10 to 50 Centigrade
Dimensions	54x54x45 mm
Weight	200 g
IP-Rating	IP50

Order Code

cf1090-kt30

sysmocom – systems for mobile communications GmbH
Alt-Moabit 93, 10559 Berlin, GERMANY

Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de
web: <http://sysmocom.de/>