

RF Duplexer 850 MHz / 30W

sysmocom

systems for mobile communications GmbH




This is a cavity duplexer for 850 MHz GSM / UMTS / LTE Band 5 operation.

You can use it to operate a GSM BTS (like our sysmoBTS) or any other BTS/NodeB/eNodeB with separate Rx and Tx ports at a single antenna.

All connectors are SMA (female).

It can support up to 30W of RF power.

RX/TX Attenuation Diagram

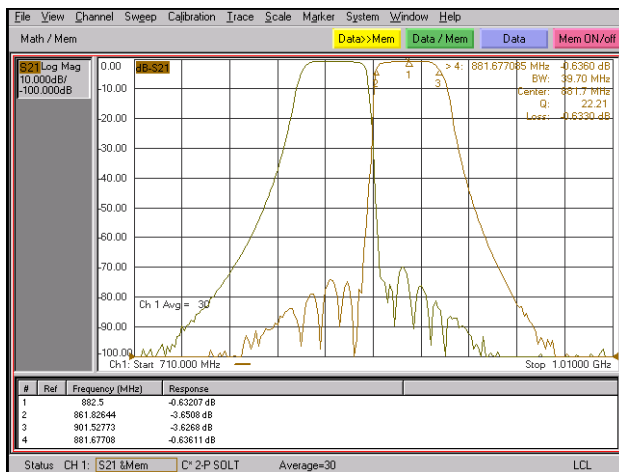

Beyond this product

sysmocom not only offers this product, but a variety of other products and services, such as

- **sysmoNITB 2G starterkit** complete ready to run 2G solution for lab testing and training
- **sysmoNITB 3.5G starterkit LE** sysmocom's first ready to run 3.5G solution
- **sysmoBSC** Base Station Controller, supporting Abis/IP as well as legacy E1 interfaces
- **sysmoNITB** autonomous self-contained GSM network
- **sysmoSIM** SIM cards, pre-programmed and with custom printing
- **sysmoBTS** range from 1TRX 0.2W to 2TRX 2x10W
- extensive portfolio of **support contracts** for all sysmocom Products
- **training services** for installation, network deployment, operation
- **vendor-agnostic integration** and inter-operation with other vendor RAN and Core Network products
- variety of sectorized and omni-directional **antennas** as well as **RF cabling** and **accessories**

Custom-tailored GSM solutions

sysmocom is not just another RAN vendor with a fixed product portfolio. All our products are based on Open Source software components, permitting customization both by sysmocom as well as the customer.

Access to the source code is key in enabling our customers to create products and services outside the constraints of existing, standardized GSM protocols, interfaces or procedures. Any aspect of our products can be modified according to customer needs.

Contact Information


We appreciate inquiries from end-users, operators as well as retailers.

sysmocom – systems for mobile communications GmbH
Alt-Moabit 93
10559 Berlin
GERMANY

Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de
web: <http://sysmocom.de/>

RF Duplexer 850 MHz / 30W

Dimensions

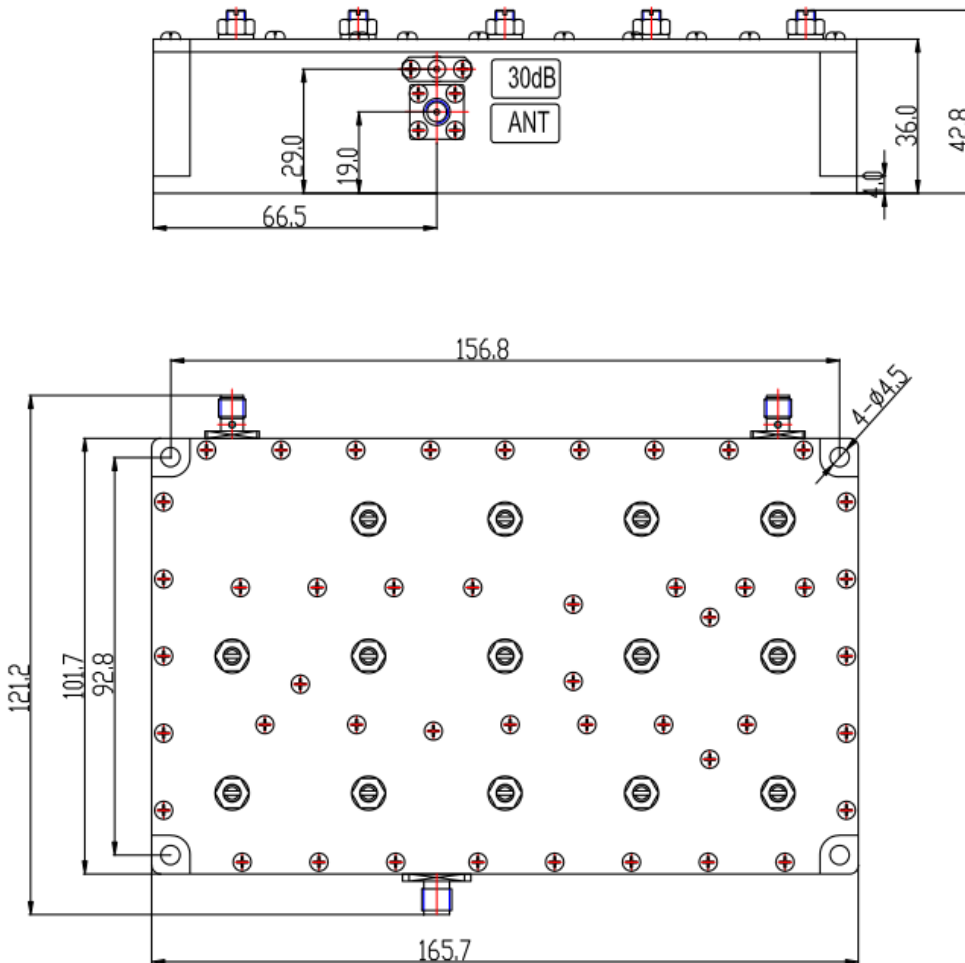

Specifications

	TX	RX
Pass Band	869 - 894 MHz	824 - 849 MHz
Insertion Loss	1.0 dB	1.0 dB
Passband Ripple	0.2 dB	0.2 dB
Rejection	50 dB @ 80-850 MHz 50 dB @ 1-3 GHz	50 dB @ 80-800 MHz 50dB @ 1-3 GHz
Return Loss	minimum 20 dB	
Impedance	50 Ohms	
Coupling Port	-30 dB (+/- 1.5 dB)	
Power	30 W average RF power	
Temperature	-20 to 75 Centigrade	
Dimensions	166x102x36 mm	
Weight	815 g	

Order Code

Dx850-kt30

sysmocom – systems for mobile communications GmbH
Alt-Moabit 93, 10559 Berlin, GERMANY

Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de
web: <http://sysmocom.de/>